UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
09/832,202	04/11/2001	Chul-Min Kim	P56351	1187

7590   08/25/2005

Robert E. Bushnell
Suite 300
1522 K Street, N.W.
Washington, DC 20005-1202

EXAMINER
VENT, JAMIE J

ART UNIT	PAPER NUMBER
2616	

DATE MAILED: 08/25/2005

Please find below and/or attached an Office communication concerning this application or proceeding.

PTO-90C (Rev. 10/03)

	Application No.	Applicant(s)
Office Action Summary	09/832,202	KIM, CHUL-MIN
	Examiner	Art Unit	
	Jamie Vent	2616	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE _3_ MONTH(S) FROM
THE MAILING DATE OF THIS COMMUNICATION.
- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed
  after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133).
  Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any
  earned patent term adjustment. See 37 CFR 1.704(b).

Status

1) ☒ Responsive to communication(s) filed on _11 April 2001_.
2a) ☐ This action is **FINAL**.   2b) ☒ This action is non-final.
3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is

   closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

4) ☒ Claim(s) _1-35_ is/are pending in the application.

   4a) Of the above claim(s) _____ is/are withdrawn from consideration.

5) ☐ Claim(s) _____ is/are allowed.
6) ☒ Claim(s) _1-35_ is/are rejected.
7) ☐ Claim(s) _____ is/are objected to.
8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

9) ☐ The specification is objected to by the Examiner.
10) ☒ The drawing(s) filed on _11 April 2001_ is/are: a) ☒ accepted or b) ☐ objected to by the Examiner.

    Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).

    Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).

11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

12) ☒ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).

    a) ☒ All   b) ☐ Some *   c) ☐ None of:

    1. ☒ Certified copies of the priority documents have been received.
    2. ☐ Certified copies of the priority documents have been received in Application No. _____.
    3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage

       application from the International Bureau (PCT Rule 17.2(a)).

    * See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

1) ☒ Notice of References Cited (PTO-892)
2) ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948)
3) ☒ Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)
   Paper No(s)/Mail Date _____.

4) ☐ Interview Summary (PTO-413)
   Paper No(s)/Mail Date. _____.
5) ☐ Notice of Informal Patent Application (PTO-152)
6) ☐ Other: _____.

DETAILED ACTION

Claim Rejections - 35 USC § 102

The following is a quotation of the appropriate paragraphs of 35

U.S.C. 102 that form the basis for the rejections under this section made in this

Office action:

> A person shall be entitled to a patent unless –
>
> (b) the invention was patented or described in a printed publication in this or a foreign country or in public use or on sale in this country, more than one year prior to the date of application for patent in the United States.

1.   Claim 21, 22, 23, 24, 25, 26, 27, 28, 29, 31, 32, 33, 34 and 35 are rejected

under 35 U.S.C. 102(b) as being unpatentable by Scott (US 4,710,922).

[Claim 21]

In regard to claim 21, Scott discloses a video player, comprising:

- a microprocessor generating control signals (Figure 1 command

  logic 101, column 13-32);

- a first lookup table for encrypting said control signals allowing said

  control signals to be transmitted over a single electrical line in

  seriatim (Figure 6 data encoder 603, column 11, line 42-48); and

- an audio/video integrated circuit (A/V IC) chip receiving control

  signals in seriatim via a single electrical pin, said control signals

  control said A/V IC chip (Figure 1 transmission media, column 7,

  line 11-19).

[Claim 22]

In regard to claim 22, Scott discloses a video player, said A/V IC chip comprising

a second lookup table for decrypting said control signals allowing said decrypted

control signals to control said A/V IC chip, said second lookup table being inverse

to said first lookup table (Column 24, 14-33 describes the second lookup table for

decrypting the control signals).

[Claim 23]

 In regard to claim 23, Scott discloses a video player of claim 21, wherein said

microprocessor outputs encrypted control signals in seriatim using a signal

electrical pin, said first lookup table being stored in a memory electrically

connected to said microprocessor (Figure 1 command logic 101, transmitter 103,

Figure 6, data encoder 603, column 11, line 42-48, Figure 3 SEROUT +, column

7, line 11-19).

[Claim 24]

In regard to claim 24, Scott discloses a video player, wherein said A/V IC chip

comprises a shift register for converting incoming encrypted serial control signals

into a plurality of parallel control signals (Figure 16 shows a shifter 1601 wherein

it converts incoming encrypted serial control signals as further described in

Column 25, line 67 to column 26, line 6).

[Claim 25]

In regard to claim 25, Scott discloses a video player, wherein said

microprocessor outputs a plurality of control signals in parallel and unencrypted

(figure 1, command signals, figure 6, command pin A, B, I, O).

[Claim 26]

In regard to claim 26, Scott discloses a video player, comprising a parallel to

serial converter chip, said parallel to serial converter chip receives said

unencrypted control signals in parallel from said microprocessor (figure 1,

command signals, figure 6, command pin A, B, I, O) and outputs encrypted

control signals in seriatim to said A/V IC chip (Figure 6, SEROUT+, column 7,

line 11-19), said parallel to serial converter chip comprising said first look up

table for encrypting said control signals (Figure 6, data encoder 603, column 11,

line 42-48,).

[Claim 27]

In regard to claim 27, Scott discloses a video player, comprising a parallel to

serial converter chip further comprises a shift register to synchronize serial

encrypted control signals transmitted from said parallel to serial converter chip to

a clock signal transmitted from said microprocessor (Figure 6, clock Gen 605 and

shifter 606).

[Claim 28]

In regard to claim 28, Scott discloses a video player, further comprising an input

panel allowing a user to input a mode of operation of said video player, said

microprocessor outputs control signals based on said user's input and based on

signals output from said A/V IC chip (Figure 2 CLS 211, column 29-46 and

column 6, line 46-62).

[Claim 29]

In regard to claim 29, Scott discloses a video player, wherein said

microprocessor outputs a chip select signal to enable said A/V IC chip and a

clock signal to said A/V IC chip, said clock signal being synchronized to said in

seriatim encrypted control signals (Figure 16, shows the clock Gen 1607 and enable command 1664).

[Claim 31]

In regard to claim 31, Scott discloses a method of transmitting control signals in a video player, said method comprising the steps of:

- generating first and second lookup tables for encrypting and decrypting respectively control signals used to control an audio/video integrated circuit (A/V IC) chip (Figure 6 shows data encoder 603, column11, line 42-48, and), said second lookup table being an inverse of said first lookup table (column 24, line 14-33); and

- transmitting control signals in parallel and a clock signal from a microprocessor (figure 6 parallel control data input A, B, I, O); and

- encrypting said parallel control signals via said first look up table located in a parallel to serial converter chip (Figure 6 data encoder 603 and shifter.606) disposed between said microprocessor and said A/V IC chip (Figure 1, command logic 101, column 4, line 13-32 and transmitter 103); and

- converting said parallel control signals into a serial control signal (Figure 6 shows parallel input control A, B, I, O and serial output SEROUT+, column 7, line 11-19); and

- synchronizing said serial control signal with said clock signal (Figure 6, clock Gen 605); and

- receiving said encrypted serial control signal via a first input pin on said A/V IC chip (Figure 16, SERIN+, column 25, line 8-24) and receiving said clock signal via a second input pin on said A/V IC chip (Figure 16, PPL Clock Generator 1606, column 25, line24-35); and

- converting said serial control signal into a plurality of parallel control signals via a shift register in said A/V IC chip (column25, line 66 to column 26, line 3); and

- decrypting said encrypted control signals using said second lookup table located in said A/V IC chip (column 26, line 4-6); and

- controlling a plurality of blocks within said A/V IC chip via said plurality of parallel decrypted control signals (Figure 1, command logic 105 and data sink 106).

[Claim 32]

In regard to claim 32, Scott discloses a method for transmitting control signals in a video player, wherein said parallel control signals transmitted from said microprocessor is based on a mode selection input by a user and on signals received from said A/V IC chip (Figure 2 CLS 211, column 5, 29-46, column 6, line 46-62, and column 7, line 41-62).

[Claim 33]

In regard to claim 33, Scott discloses a method of transmitting control signals in a video player, said method comprising the steps of:

- generating first and second lookup tables for encrypting and decrypting respectively control signals used to control an audio/video integrated circuit (A/V IC) chip (Figure 6 shows data encoder 603, column11, line 42-48, and), said second lookup table being an inverse of said first lookup table (column 24, line 14-33); and

- transmitting a encrypted serial control signal and a clock signal synchronized to said encrypted serial control signal from said microprocessor to said A/V IC chip over a pair of electrical connection line (column 23, line 54-59 and column17, 38-44); and

- receiving said encrypted serial control signal via a first input pin on said A/V IC chip (Figure 16, SERIN+, column 25, line 8-24) and receiving said clock signal via a second input pin on said A/V IC chip (Figure 16, PPL Clock Generator 1606, column 25, line24-35); and

- converting said serial control signal into a plurality of parallel control signals via a shift register in said A/V IC chip (column25, line 66 to column 26, line 3); and

- decrypting said encrypted control signals using said second lookup table located in said A/V IC chip (column 26, line 4-6); and

- controlling a plurality of blocks within said A/V IC chip via said plurality of parallel decrypted control signals (Figure 1, command logic 105 and data sink 106).

[Claim 34]

In regard to claim 34, Scott discloses a method of transmitting control signals,

wherein said encrypted serial control signal transmitted from said microprocessor

is based on a mode selection input by a user (column7, line 41-62), on signals

received from said A/V IC chip information gleaned from said first lookup table

(Figure 6 data encoder 603, column 11, line 42-48).

[Claim 35]

In regard to claim 35, Scott discloses a method of transmitting control signal, said

first lookup table residing in a read only memory (Figure 6 data encoder 603,

column 11, line 42-48) electrically connected to said microprocessor (Figure 1

command logic 101 and transmitter 103 are connected).

Claim Rejections - 35 USC § 103

The following is a quotation of 35 U.S.C. 103(a) which forms the basis for

all obviousness rejections set forth in this Office action:

> (a) A patent may not be obtained though the invention is not identically disclosed or described
> as set forth in section 102 of this title, if the differences between the subject matter sought to
> be patented and the prior art are such that the subject matter as a whole would have been
> obvious at the time the invention was made to a person having ordinary skill in the art to which
> said subject matter pertains. Patentability shall not be negatived by the manner in which the
> invention was made.

2.   Claim 1, 14, 15, 16, 18, 19, 20 are rejected under 35 U.S.C. 103(a) as

being unpatentable over Kloker et al (US 5,479,445) in view of Scott (US

4,710,922).

[Claim 1]

In regard to claim 1, Kloker et al discloses a control signal transmitting

method in a video player having an integrated circuit (IC) for processing

video/audio signals and a microprocessor generating control signals to control

the IC (Figure 1 unmodulated serial digital audio source 22, modulated digital

audio sink 16 and transceiver 20, column 5, line 22-34), the control signal

transmitting method comprising the steps of:

- mapping serial data corresponding to possible control states of the

  video/audio signal processing IC onto a predetermined control

  signal (Figure 2 unmodulated input 24, transmit serial interface 42,

  digital audio modulator 46 and modulated output, column 1, line 24-

  45, column 7, line 30-53 and column 10, 13-27); and

- reading serial data corresponding to a control state of the

  video/audio signal processing IC requested by the microprocessor

  (Figure 2, modulated input 14, digital audio demodulator 34, receive

  serial interface, unmodulated output 30 and receive mode control,

  column 9, line 9-52); and

- transmitting the serial data to the video/audio signal processing IC,

  being synchronized to a clock signal (figure 2, clock generation and

  control 40).

Kloker et al also teaches a read only memory circuit for logic circuitry (column 4

line 37-55 and column 5, line 26-33). However, Kloker et al fails to disclose a

lookup table. Scott discloses lookup tables in his signal transmitting method

(figure 6, data encoder 603, column 11, line 42-48, input buffer and serial input

data qualifier 608, line 17-65). Thereby, the system allows communication

between different components without adding additional logic circuitry.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to use control signal transmitting method, disclosed by Kloker et al, and incorporate the lookup table, disclosed Scott, to reduce the amount of component in the circuitry to achieve a cost efficient system.

[Claim 14]

In regard to claim 14, Kloker et al discloses the control signal transmitting method of, wherein in the transmitting process, the serial data is transmitted being synchronized to a synchronization signal during an interval where a chip select signal (CS) indicating a selection state of the video/audio IC is enabled (column 10, line 29-43); however, Kloker et al fails to disclose a lookup table for grouping the control signal. Scott discloses lookup tables in his signal transmitting method (figure 6, data encoder 603, column 11, line 42-48, input buffer and serial input data qualifier 608, line 17-65). Thereby, the system allows communication between different components without adding additional logic circuitry.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to use control signal transmitting method, disclosed by Kloker et al, and incorporate the lookup table, disclosed Scott, to reduce the amount of component in the circuitry to achieve a cost efficient system.

[Claim 15]

In regard to claim 15, Kloker et al discloses a control signal receiving method in a video/audio processing IC, which is applied to a video player, internally has a plurality of blocks, and controls the operation of each block in response to a control signal applied from the out side (Figure 1, modulated digital audio source

12, transceiver 20, and unmodulated digital audio sink 28), the control signal

receiving method comprising the steps of:

- mapping control signals corresponding to possible control states

  and storing the mapped control signals (column 1, line 46 to

  column2 line 6); and

- receiving serial data corresponding to a control state requested by

  the video player (Figure 2, receive mode control 13); and

- generating control signals corresponding to the received serial data

  referring (Figure 2, receive load control 37 and receive digital data

  36).

However, Kloker et al fails to disclose a lookup table. Scott discloses lookup

tables in his signal transmitting method (figure 6, data encoder 603, column 11,

line 42-48, input buffer and serial input data qualifier 608, line 17-65). Thereby,

the system allows communication between different components without adding

additional logic circuitry. Therefore, it would have been obvious to one of

ordinary skill in the art at the time the invention was made to use control signal

transmitting method, disclosed by Kloker et al, and incorporate the lookup table,

disclosed Scott, to reduce the amount of component in the circuitry to achieve a

cost efficient system.

[Claim 16]

In regard to claim 16, Kloker et al discloses a control signal transmitting

apparatus in a video player having an IC for processing video/audio signals and

a microprocessor generating control signals to control the IC (Figure 1

unmodulated serial digital audio source 22, transceiver 20, modulated digital

audio sink 16, column 5, line 22-34), the control signal transmitting apparatus

comprising:

- mapped serial data corresponding to possible control states of the

  video/audio processing IC (column 4, line 37-55 and column1 line

  23 to column 2, line 6); and

- a shift register reading serial data corresponding to the control

  states of the video/audio processing IC requested by the

  microprocessor (Figure 4 shift register 70,72, 74, 76, 78, 80, 82 and

  figure 6 shift register 94, 96, 98, 100, 102, 104, 106, 108, 109), and

  outputting the data serially being synchronized to a clock signal

  (Figure 2 clock generation and control 40).

However, Kloker et al fails to disclose a lookup table. Scott discloses lookup

tables in his signal transmitting method (figure 6, data encoder 603, column 11,

line 42-48, input buffer and serial input data qualifier 608, line 17-65). Thereby,

the system allows communication between different components without adding

additional logic circuitry. Therefore, it would have been obvious to one of

ordinary skill in the art at the time the invention was made to use control signal

transmitting method, disclosed by Kloker et al, and incorporate the lookup table,

disclosed Scott, to reduce the amount of component in the circuitry to achieve a

cost efficient system.

[Claim 18]

In regard to claim 18, Kloker et al discloses a control signal transmitting apparatus of claim 16, wherein the shift register necessarily reads serial data of the first group corresponding to the operation modes of the video player (figure 4 shift register 70, 74, and 78, figure 2 receiver and figure 7 through 14) and serial data of the other groups is selectively read according to the control state, whenever a request for transmitting a control signal occurs (column 40, line 11-49). However, Kloker et al fails to disclose a lookup table. Scott discloses lookup tables in his signal transmitting method (figure 6, data encoder 603, column 11, line 42-48, input buffer and serial input data qualifier 608, line 17-65). Thereby, the system allows communication between different components without adding additional logic circuitry. Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to use control signal transmitting method, disclosed by Kloker et al, and incorporate the lookup table, disclosed Scott, to reduce the amount of component in the circuitry to achieve a cost efficient system.

[Claim 19]

In regard to claim 19, Kloker et al discloses a video/audio processing IC, which is applied to a video player, internally has a plurality of blocks, and controls the operation of each block in response to a control signal applied from the outside, (Figure 1, modulated digital audio source 12, transceiver 20, and unmodulated digital audio sink 28) the video/audio processing IC comprising:

- a latch for receiving serial data corresponding to a control state requested by the video player (column 9 line 9-30); and

- serial data corresponding to control signals corresponding to possible control states of the video/audio processing IC is mapped (column 1, line 23 to column 2, line 6).

However, Kloker et al fails to disclose a latch and a decoder having lookup table. Scott discloses a decoder having a lookup table (figure 16, decoder latch 1602, and decoder 1603, column 27, line 45 to column 28, line 19 and column 24, line 14-37). Thereby, the clock period can be reduced and the system allows communication between different components without adding additional logic circuitry. Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to use the video/audio processing IC, disclosed by Kloker et al, and incorporate the lookup table and the latch, disclosed Scott, to reduce the amount of component in the circuitry and the clock period. Thereby, a fast and cost efficient system can be achieved.

[Claim 20]

In Regard to claim 20, Kloker et al discloses a video/audio processing IC, wherein the serial data is formed of a first group having necessary control states corresponding to the operation modes of the video player and the other group having control states corresponding to selective operation modes attached to the operation modes, and the decoder preferentially decodes control signals corresponding the first group (column 42 line 1-30). However, Kloker et al fails to disclose a latch and a decoder having lookup table. Scott discloses a decoder having a lookup table (figure 16, decoder latch 1602, and decoder 1603, column 27, line 45 to column 28, line 19 and column 24, line 14-37). Thereby, the clock

period can be reduced and the system allows communication between different

components without adding additional logic circuitry. Therefore, it would have

been obvious to one of ordinary skill in the art at the time the invention was made

to use the video/audio processing IC, disclosed by Kloker et al, and incorporate

the lookup table and the latch, disclosed Scott, to reduce the amount of

component in the circuitry and the clock period. Thereby, a fast and cost efficient

system can be achieved.

3.   Claim 2, 3, 4, 5, 6, 7, 9, 11, 12, 13, & 17 are rejected under 35 U.S.C.

103(a) as being unpatentable over Kloker et al (US 5,479,445) in view of Scott

(US 4,710,922) in the further view of Takimoto (US 5,966,496).

[Claims 2, 17]

In regard to claims 2 and 17, Kloker et al discloses a control signal transmitting

method, wherein mapping serial data corresponding to each of the control states

(column 1 line 24 to column 2 line 5). However, Kloker fails to disclose the

mapping process. Scott also discloses a control signal transmitting method.

However, Scott fails to disclose the mapping process. Takimoto discloses a

mapping process comprises the steps of:

- grouping possible control states into a first group having necessary
  control states; corresponding to the operation modes of the video
  player (column 15, line 29-37); and

- grouping control states corresponding to selective operation

modes attached to the operation modes (column 17, line 9-64); and

Thereby, the system allows communication between different components

without adding additional logic circuitry. Therefore, it would have been obvious to

one of ordinary skill in the art at the time the invention was made to use control

signal transmitting method, disclosed by Kloker et al, and the signal transmitting

method, disclosed Scott, and incorporate the mapping process, disclosed by

Takimoto, to reduce the amount of component in the circuitry to achieve a cost

efficient system.

[Claim 3]

In regard to claim 3, Kloker et al discloses a control signal transmitting method.

However, Kloker fails to disclose the mapping process. Scott also discloses a

control signal transmitting method. However, Scott fails to disclose the mapping

process. Takimoto discloses a mapping process, wherein the first group

comprises:

Control states related to video recording/reproducing and audio

recording/reproducing (column 15, line 29-37, column 16, line 52-58); thereby,

the system allows communication between different components without adding

additional logic circuitry. Therefore, it would have been obvious to one of

ordinary skill in the art at the time the invention was made to use control signal

transmitting method, disclosed by Kloker et al, and the signal transmitting

method, disclosed Scott, and incorporate the mapping process, disclosed by

Takimoto, to reduce the amount of component in the circuitry to achieve a cost

efficient system.

[Claim 4]

In regard to claim 4, Kloker et al discloses a control signal transmitting method.

However, Kloker fails to disclose the mapping process. Scott also discloses a

control signal transmitting method. However, Scott fails to disclose the mapping

process. Takimoto discloses a mapping process, wherein the first group further

comprises:

Control states related to head amp recording/reproducing/recording pause

(column 3, line 29- 67); thereby, the system allows communication between

different components without adding additional logic circuitry. Therefore, it would

have been obvious to one of ordinary skill in the art at the time the invention was

made to use control signal transmitting method, disclosed by Kloker et al, and the

signal transmitting method, disclosed Scott, and incorporate the mapping

process, disclosed by Takimoto, to reduce the amount of component in the

circuitry to achieve a cost efficient system.

[Claim 5]

In regard to claim 5, Kloker et al discloses a control signal transmitting method.

However, Kloker fails to disclose the mapping process. Scott also discloses a

control signal transmitting method. However, Scott fails to disclose the mapping

process. Takimoto discloses a mapping process, wherein the first group

comprises: control states related to input channel selection (column 10, line 29

to column 11, line 47); Thereby, the system allows communication between

different components without adding additional logic circuitry. Therefore, it would

have been obvious to one of ordinary skill in the art at the time the invention was

made to use control signal transmitting method, disclosed by Kloker et al, and the

signal transmitting method, disclosed Scott, and incorporate the mapping

process, disclosed by Takimoto, to reduce the amount of component in the

circuitry to achieve a cost efficient system.

[Claim 6]

Claim 6 meets the limitations of claim 3, 4, and 5.

[Claim 7]

In regard to claim 7, **Kloker** et al discloses a control signal transmitting method.

However, Kloker fails to disclose the mapping process. Scott also discloses a

control signal transmitting method. However, Scott fails to disclose the mapping

process. Takimoto discloses a mapping process, wherein the first group

comprises:

Control states related to recording speed of a video/audio signal, detail amount,

noise remove amount, are grouped into a second group and mapped (column 6,

line 35-58, column 7, line 58-65); Thereby, the system allows communication

between different components without adding additional logic circuitry.

Therefore, it would have been obvious to one of ordinary skill in the art at the

time the invention was made to use control signal transmitting method, disclosed

by Kloker et al, and the signal transmitting method, disclosed Scott, and

incorporate the mapping process, disclosed by Takimoto, to reduce the amount

of component in the circuitry to achieve a cost efficient system.

[Claim 9]

In regard to claim 7, Kloker et al discloses a control signal transmitting method. However, Kloker fails to disclose the mapping process. Scott also discloses a control signal transmitting method. However, Scott fails to disclose the mapping process. Takimoto discloses a mapping process, wherein the first group comprises:

Control states related to the mixing ration of luminance/chromaticity signal, recoding current control amount, recording equalize control amount are grouped into a third group and mapped (column 14 line 37 to column 15, line 21);

Thereby, the system allows communication between different components without adding additional logic circuitry. Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to use control signal transmitting method, disclosed by Kloker et al, and the signal transmitting method, disclosed Scott, and incorporate the mapping process, disclosed by Takimoto, to reduce the amount of component in the circuitry to achieve a cost efficient system.

[Claim 11]

In regard to claim 7, Kloker et al discloses a control signal transmitting method. However, Kloker fails to disclose the mapping process. Scott also discloses a control signal transmitting method. However, Scott fails to disclose the mapping process. Takimoto discloses a mapping process, wherein each group has at least one sub group including control state having common characteristics, and sub group are mapped corresponding to at least on bit in N bits assigned to the

group the sub groups belong to (column 5, line 30-37) Thereby, the system

allows communication between different components without adding additional

logic circuitry. Therefore, it would have been obvious to one of ordinary skill in

the art at the time the invention was made to use control signal transmitting

method, disclosed by Kloker et al, and the signal transmitting method, disclosed

Scott, and incorporate the mapping process, disclosed by Takimoto, to reduce

the amount of component in the circuitry to achieve a cost efficient system.

[Claim 12]

In regard to claim 12, Kloker et al discloses a control signal transmitting method

of claim wherein in the reading process, serial data of the first group

corresponding to the operation modes of the video player is necessarily read and

serial data of the other groups is selectively read according to the control state,

whenever a request for transmitting a control signal occurs (column 5, line 8-12

and column 11, line 14-18); however, Kloker et al fails to disclose a lookup table

for grouping the control signal.

Scott discloses lookup tables in his signal transmitting method (figure 6, data

encoder 603, column 11, line 42-48, input buffer and serial input data qualifier

608, line 17-65). Thereby, the system allows communication between different

components without adding additional logic circuitry. Therefore, it would have

been obvious to one of ordinary skill in the art at the time the invention was made

to use control signal transmitting method, disclosed by Kloker et al, and

incorporate the lookup table, disclosed Scott, to reduce the amount of component

in the circuitry to achieve a cost efficient system.

[claim 13]

In regard to claim 12, Kloker et al wherein in the transmitting process, the first

group is preferentially transmitted (Figure 2 shows the transmission of data

through the control 40 and furthermore described in Column 4 Lines 37-55 and

Column 5 Lines 26-33).

4.   Claim 30 are rejected under 35 U.S.C. 103(a) as being unpatentable over

Scott (US 4, 710,922) in view of Mok (US 6,016,169).

[Claim 30]

In regard to claim 30, Scott discloses a video player. However, Scott fails to

disclose the A/V IC chip comprises three electrical input pins. Mok discloses an

A/V IC chip comprises three electrical input pins, one for the control signals, one

for the clock signal, and the last for the chip select signal (Figure 2, ck, D and set

inputs, column 3, line 51 to column 4, line 17 and column 7, line 28-44).

Thereby, the amount of pin is minimized. Therefore, it would have been obvious

to one of ordinary skill in the art at the time the invention was made to use video

player, disclosed by Scott, and incorporated the A/V IC chip, disclosed by Mok, to

simplify the IC chip fabrication process and reduce the cost of the chip.

Allowable Subject Matter

5.   Claims 8 and 10 are objected to as being dependent upon a rejected base

claim, but would be allowable if rewritten in independent form including all of the

limitations of the base claim and any intervening claims.

Kloker et al discloses a control signal transmitting method in a video player having an integrated circuit (IC) for processing video/audio signals and a microprocessor generating control signals to control the IC (Figure 1 unmodulated serial digital audio source 22, modulated digital audio sink 16 and transceiver 20, column 5, line 22-34); however, fails to disclose the lookup tables that are depicted in Claims 8 and 10.

Conclusion

The prior art made of record and not relied upon is considered pertinent to applicant's disclosure.

- Iwamoto (US 5,025,414);

- Imanishi (US 5,974,055).

Contact Information

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Jamie Vent whose telephone number is 571-272-7384. The examiner can normally be reached on 7:30am-5:00pm.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, James Groody can be reached on 571-272-7950. The fax phone number for the organization where this application or proceeding is assigned is 703-872-9306.

Information regarding the status of an application may be obtained from

the Patent Application Information Retrieval (PAIR) system. Status information

for published applications may be obtained from either Private PAIR or Public

PAIR. Status information for unpublished applications is available through

Private PAIR only. For more information about the PAIR system, see http://pair-

direct.uspto.gov. Should you have questions on access to the Private PAIR

system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-

free).

Jamie Vent
08/12/05
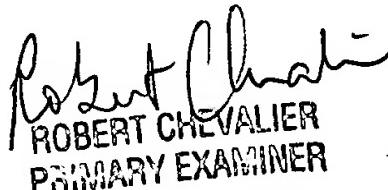
ROBERT CHEVALIER
PRIMARY EXAMINER